A11BVRA1

Released by HIWIN design group. ▽▽ (▽▽▽)

列印者:00020334 黃品綺 列印時間:2021/07/08 19:13:46
機密級 More Confidential

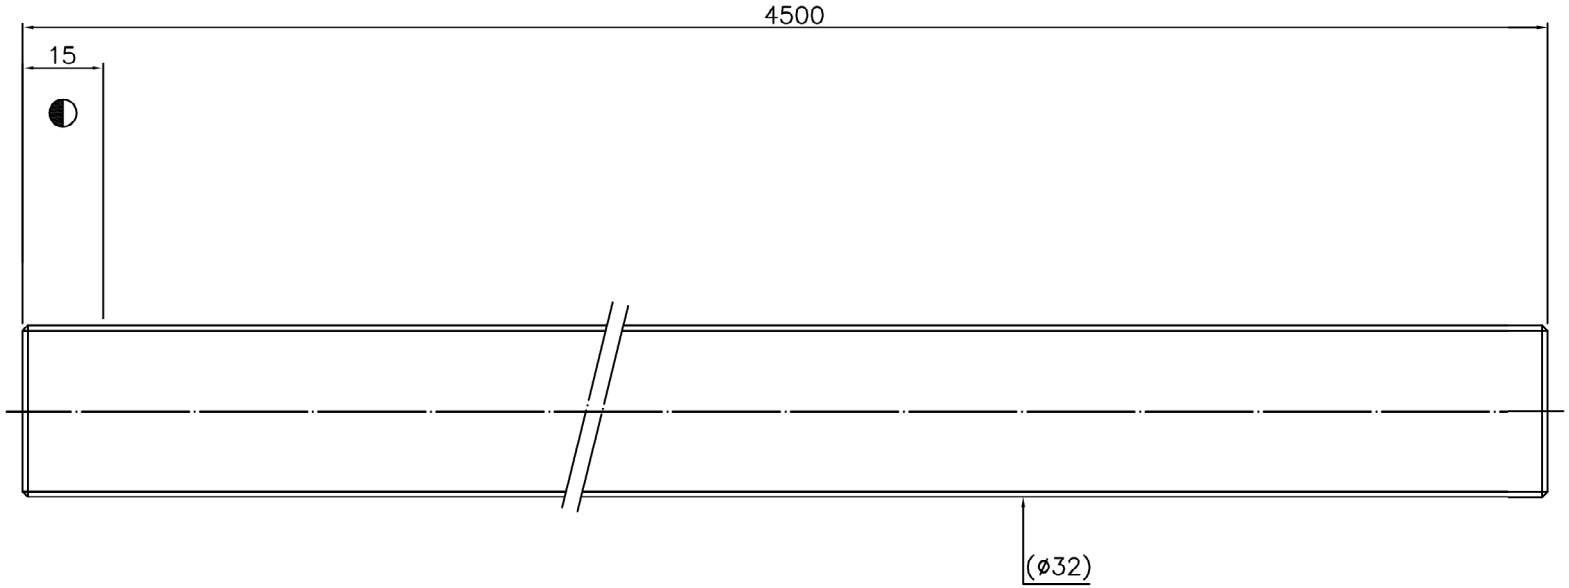

SPEC: 2R32-20-4500-4500-0.05

MAX. AXIAL LOAD(kgf)		LUBRICATION		PRELOAD(kgf)	~
MAX. ROTATIONAL SPEED(rpm)		SPACE BALL		R.D.	28.594
DN VALUE		E1 TYPE ASSEMBLY METHOD		S.F. (kgf)	~
MAX. FEED RATE(m/min)		CUSTOMER DRAWING NO.		DRAG TORQUE(kgf-cm)	~
ACCELERATION(m/sec²)		CUSTOMER MC TYPE		DIRECTION OF TURN	R
SUPPORT METHOD		CUSTOMER AXIAL TYPE		P.C. DIA.	32.65
				BALL DIA.	3.969
				BACKLASH	~
				CIRCUIT	~
				LEAD ANGLE	11.03
				DYNAMIC (kgf)	~
				STATIC (kgf)	~
				LEAD/PITCH	20/10

THREAD LENGTH

+ 0 −

T_p $+e_p$ $-e_p$

V_{300p}: 0.05

e_p: 0.75

UNCHAMFERED USE ☐R0.5 ■R1 ☐R

ROUGH M/C	FIN M/C	GRD
25a ▽	6.3a ▽▽	0.4a ▽▽▽

SCALE 1: X

NORMAL TOLERANCE mm

UP TO 6	6 30	30 120	120 300	300 600	600 1200	1200 2400	OVER 2400
±0.1	±0.2	±0.3	±0.4	±0.5	±0.8	±1.0	±1.5

HIWIN® BALLSCREWS

MAT.	SH: CF53/Equivalent	DATE	2008.08.29
		DWG	Penny
THREAD	BALL TRACK HRC 56 ~ 62	APPD	Lady
		PROCESS NO.	G
CUSTR	HIWIN STD.		
DWG.NO.	A11BVRA1		

*BREAK SHARP EDGE UNLESS OTHER SPECIFIED.
*未畫倒角者以R0.5MAX

◐ THREAD END ALLOWS ABOVE LENGTH OUT OF HARDNESS TOLERANCE

DATE	MODIFICATION	APPROVED

* PLEASE IGNORE CHINESE CHARACTERS WHICH ARE FOR OUR REFERENCE ONLY.

機密級 More Confidential
列印者:00020334 黃品綺 列印時間:2021/07/08 19:13:46